



The DNA of tech.™

# Product Termination Notification



Product Group: SIL/Wed Jun 14, 2023/PTN-SIL-032-2023-REV-0

## Conversion to Copper (Cu) Wire – SQ4401EY

For further information, please contact your regional Vishay office.

### CONTACT INFORMATION

#### Americas

Vishay Siliconix  
2565 Junction Ave  
-  
San Jose CA United States 95134  
Phone: 4089705799  
Fax: 4089705799  
business-america@vishay.com

#### Europe

Vishay Electronic GmbH  
Dr.-Felix-Zandman-Platz 1  
-  
Selb Germany 95100  
Phone: 49-9287-71 0  
Fax: 49-9287-70435  
business-europe@vishay.com

#### Asia

Vishay Intertechnology Asia Pte. Ltd  
37A Tampines Street 92 #07-01  
-  
Singapore Singapore 528886  
Phone: 65 6788 6668  
Fax: 65 6788 0988  
business-asia@vishay.com

**Description of Change:** The affected part number listed in this notification will be converted to a Copper wire material set. The new ordering code is SQ4401CEY-T1\_GE3, which has the exact same product performance and fit as SQ4401EY. There will be no change to the wafer fab or assembly location (Note: parts with \_BE3 suffix will be consolidated to single assembly location in China). There will be no changes to the parameters on the datasheet (reference: SQ4401CEY Doc #62016 Rev.B)

**Classification of Change:** Standardization of materials

**Expected Influence on Quality/Reliability/Performance:** None

**Part Numbers/Series/Families Affected:** SQ4401EY-T1\_GE3, SQ4401EY-T1\_BE3,

**Vishay Brand(S):** Vishay Siliconix

#### Time Schedule:

Last Time Buy Date: Mon Dec 18, 2023

Last Time Ship Date: Mon Jun 17, 2024

**Sample Availability:** Qualified samples of replacement product are available on request

**Product Identification:** SQ4401CEY-T1\_GE3


**Qualification Data:** AEC Q101 qualification data of replacement product is available. Qualification PPAP is available now

**This PTN is considered approved, without further notification, unless we receive specific customer concerns before Mon Dec 18, 2023 or as specified by contract.**

**Issued By:** Vishay Siliconix, business-america@vishay.com




## Automotive P-Channel 40 V (D-S) 175 °C MOSFET

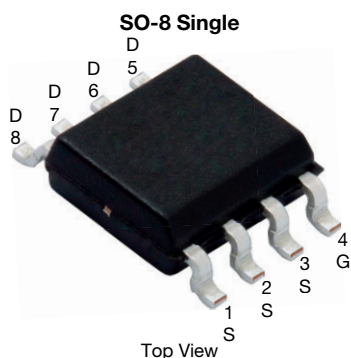

## FEATURES

- TrenchFET® power MOSFET
- AEC-Q101 qualified
- 100 % R<sub>g</sub> and UIS tested
- Material categorization:  
for definitions of compliance please see [www.vishay.com/doc?99912](http://www.vishay.com/doc?99912)

AUTOMOTIVE  
GRADERoHS  
COMPLIANT  
HALOGEN  
FREE

P-Channel MOSFET

| PRODUCT SUMMARY                                     |        |
|---|--------|
| V <sub>DS</sub> (V)                                 | -40    |
| R <sub>DS(on)</sub> (Ω) at V <sub>GS</sub> = -10 V  | 0.014  |
| R <sub>DS(on)</sub> (Ω) at V <sub>GS</sub> = -4.5 V | 0.023  |
| I <sub>D</sub> (A)                                  | -17.3  |
| Configuration                                       | Single |

| ORDERING INFORMATION            |   |
|---------------------------------|---|
| Package                         | SO-8  |
| Lead (Pb)-free and halogen-free | SQ4401CEY<br>(for detailed order number please see <a href="http://www.vishay.com/doc?79771">www.vishay.com/doc?79771</a> ) |

| ABSOLUTE MAXIMUM RATINGS (T <sub>C</sub> = 25 °C, unless otherwise noted) |                                   |                         |       |
|---|-----------------------------------|-------------------------|-------|
| PARAMETER   | SYMBOL                            | LIMIT                   | UNIT  |
| Drain-source voltage  | V <sub>DS</sub>                   | -40                     | V     |
| Gate-source voltage   | V <sub>GS</sub>                   | ± 20                    |       |
| Continuous drain current  | I <sub>D</sub>                    | T <sub>C</sub> = 25 °C  | -17.3 |
|   |                                   | T <sub>C</sub> = 125 °C | -10   |
| Continuous source current (diode conduction)                              | I <sub>S</sub>                    | -6.5                    | A     |
| Pulsed drain current <sup>a</sup>   | I <sub>DM</sub>                   | -69                     |       |
| Single pulse avalanche current  | I <sub>AS</sub>                   | -30                     |       |
| Single pulse avalanche energy   | E <sub>AS</sub>                   | 45                      | mJ    |
| Maximum power dissipation   | P <sub>D</sub>                    | T <sub>C</sub> = 25 °C  | 7.14  |
|   |                                   | T <sub>C</sub> = 125 °C | 2.4   |
| Operating junction and storage temperature range                          | T <sub>J</sub> , T <sub>stg</sub> | -55 to +175             | °C    |

| THERMAL RESISTANCE RATINGS |                   |       |      |
|----------------------------|-------------------|-------|------|
| PARAMETER                  | SYMBOL            | LIMIT | UNIT |
| Junction-to-ambient        | R <sub>thJA</sub> | 85    | °C/W |
| Junction-to-foot (drain)   | R <sub>thJF</sub> | 21    |      |

## Notes

- Pulse test; pulse width ≤ 300 μs, duty cycle ≤ 2 %
- When mounted on 1" square PCB (FR-4 material)



| SPECIFICATIONS ( $T_C = 25\text{ }^\circ\text{C}$ , unless otherwise noted) |               |  |      |       |           |               |
|---|---------------|--|------|-------|-----------|---------------|
| PARAMETER   | SYMBOL        | TEST CONDITIONS  | MIN. | TYP.  | MAX.      | UNIT          |
| <b>Static</b>   |               |  |      |       |           |               |
| Drain-source breakdown voltage  | $V_{DS}$      | $V_{GS} = 0, I_D = -250\text{ }\mu\text{A}$  | -40  | -     | -         | V             |
| Gate-source threshold voltage   | $V_{GS(th)}$  | $V_{DS} = V_{GS}, I_D = -250\text{ }\mu\text{A}$   | -1.5 | -2.0  | -2.5      |               |
| Gate-source leakage   | $I_{GSS}$     | $V_{DS} = 0\text{ V}, V_{GS} = \pm 20\text{ V}$  | -    | -     | $\pm 100$ | nA            |
| Zero gate voltage drain current   | $I_{DSS}$     | $V_{GS} = 0\text{ V}, V_{DS} = -40\text{ V}$   | -    | -     | -1.0      | $\mu\text{A}$ |
|   |               | $V_{GS} = 0\text{ V}, V_{DS} = -40\text{ V}, T_J = 125\text{ }^\circ\text{C}$  | -    | -     | -50       |               |
|   |               | $V_{GS} = 0\text{ V}, V_{DS} = -40\text{ V}, T_J = 175\text{ }^\circ\text{C}$  | -    | -     | -150      |               |
| On-state drain current <sup>a</sup>   | $I_{D(on)}$   | $V_{GS} = -10\text{ V}, V_{DS} \geq -5\text{ V}$   | -30  | -     | -         | A             |
| Drain-source on-state resistance <sup>a</sup>                               | $R_{DS(on)}$  | $V_{GS} = -10\text{ V}, I_D = -10.5\text{ A}$  | -    | 0.011 | 0.014     | $\Omega$      |
|   |               | $V_{GS} = -10\text{ V}, I_D = -10.5\text{ A}, T_J = 125\text{ }^\circ\text{C}$   | -    | -     | 0.020     |               |
|   |               | $V_{GS} = -10\text{ V}, I_D = -10.5\text{ A}, T_J = 175\text{ }^\circ\text{C}$   | -    | -     | 0.024     |               |
|   |               | $V_{GS} = -4.5\text{ V}, I_D = -8.7\text{ A}$  | -    | 0.018 | 0.023     |               |
| Forward transconductance <sup>a</sup>                                       | $g_{fs}$      | $V_{DS} = -15\text{ V}, I_D = -10.5\text{ A}$  | -    | 30    | -         | S             |
| <b>Dynamic <sup>b</sup></b>   |               |  |      |       |           |               |
| Input capacitance   | $C_{iss}$     | $V_{GS} = 0\text{ V}, V_{DS} = -20\text{ V}, f = 1\text{ MHz}$   | -    | 3471  | 4250      | $\text{pF}$   |
| Output capacitance  | $C_{oss}$     |  | -    | 526   | 580       |               |
| Reverse transfer capacitance  | $C_{rss}$     |  | -    | 349   | 436       |               |
| Total gate charge <sup>c</sup>  | $Q_g$         | $V_{GS} = -10\text{ V}, V_{DS} = -20\text{ V}, I_D = -10.5\text{ A}$   | -    | 71    | 115       | nC            |
| Gate-source charge <sup>c</sup>   | $Q_{gs}$      |  | -    | 11.4  | -         |               |
| Gate-drain charge <sup>c</sup>  | $Q_{gd}$      |  | -    | 18.3  | -         |               |
| Gate resistance   | $R_g$         | $f = 1\text{ MHz}$   | 0.95 | 1.90  | 3.21      | $\Omega$      |
| Turn-on delay time <sup>c</sup>   | $t_{d(on)}$   | $V_{DD} = -15\text{ V}, R_L = 15\text{ }\Omega, I_D \cong -1\text{ A}, V_{GEN} = -4.5\text{ V}, R_g = 6\text{ }\Omega$ | -    | 35    | 85        | ns            |
| Rise time <sup>c</sup>  | $t_r$         |  | -    | 52    | 105       |               |
| Turn-off delay time <sup>c</sup>  | $t_{d(off)}$  |  | -    | 62    | 85        |               |
| Fall time <sup>c</sup>  | $t_f$         |  | -    | 50    | 55        |               |
| <b>Source-Drain Diode Ratings and Characteristics <sup>b</sup></b>          |               |  |      |       |           |               |
| Pulsed current <sup>a</sup>   | $I_{SM}$      |  | -    | -     | -69       | A             |
| Forward voltage   | $V_{SD}$      | $I_F = -2.7\text{ A}, V_{GS} = 0\text{ V}$   | -    | -0.75 | -1.1      | V             |
| Body diode reverse recovery time  | $t_{rr}$      | $I_F = -2.1\text{ A}, di/dt = 100\text{ A}/\mu\text{s}$  | -    | 30    | 60        | ns            |
| Body diode reverse recovery charge  | $Q_{rr}$      |  | -    | 36    | 72        | nC            |
| Reverse recovery fall time  | $t_a$         |  | -    | 19    | -         | ns            |
| Reverse recovery rise time  | $t_b$         |  | -    | 11    | -         |               |
| Body diode peak reverse recovery current                                    | $I_{RM(REC)}$ |  | -    | -2.5  | -         | A             |


**Notes**

- a. Pulse test; pulse width  $\leq 300\text{ }\mu\text{s}$ , duty cycle  $\leq 2\%$   
b. Guaranteed by design, not subject to production testing  
c. Independent of operating temperature


Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.




**TYPICAL CHARACTERISTICS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

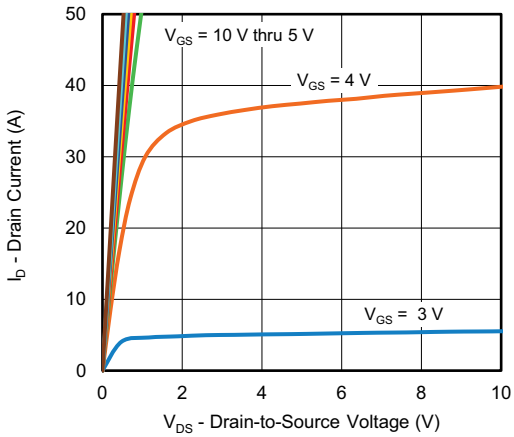


**Output Characteristics**

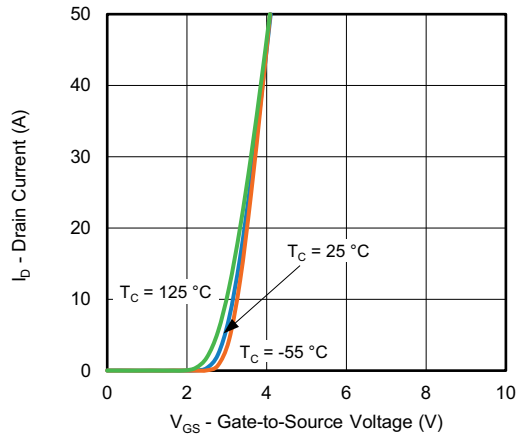


**Transfer Characteristics**

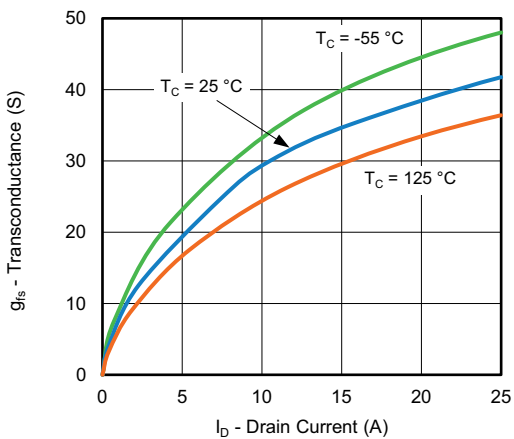


**Transconductance**

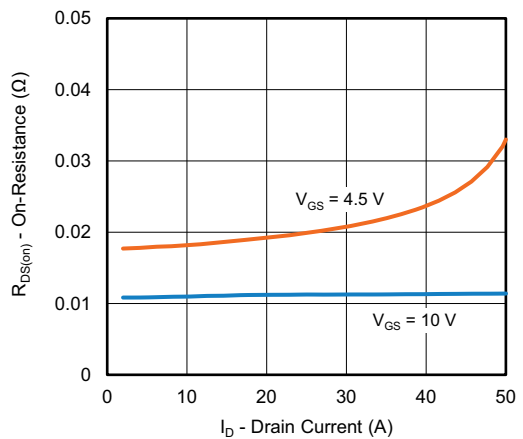

**On-Resistance vs. Drain Current**

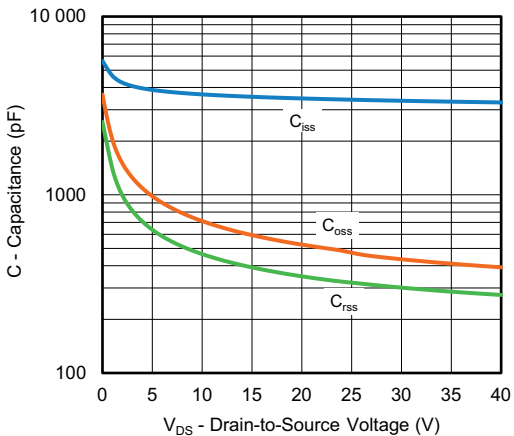


**Capacitance**

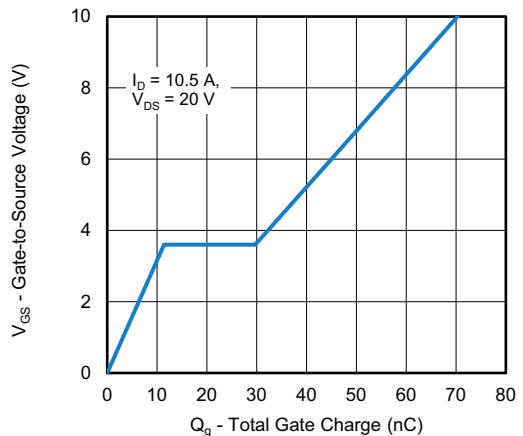


**Gate Charge**




**TYPICAL CHARACTERISTICS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

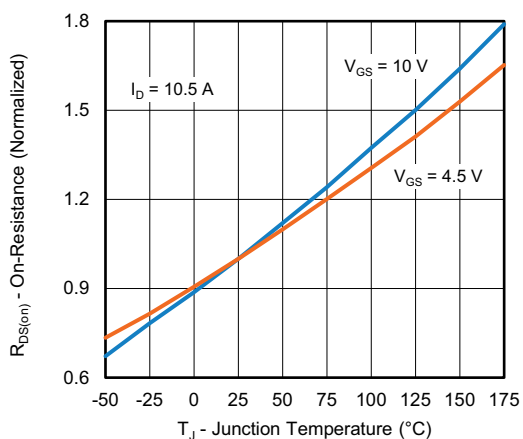


**On-Resistance vs. Junction Temperature**

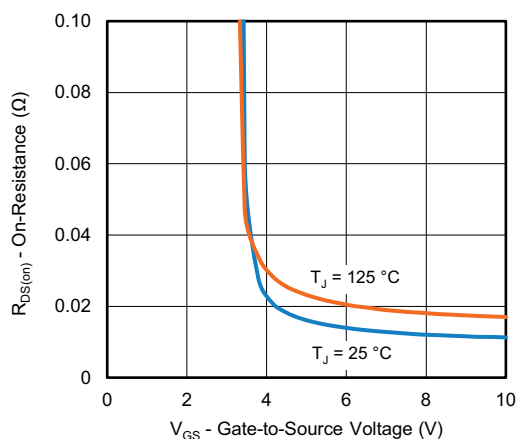


**On-Resistance vs. Gate-to-Source Voltage**

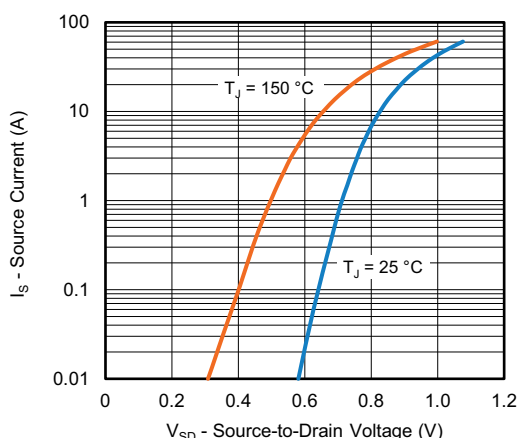


**Source Drain Diode Forward Voltage**

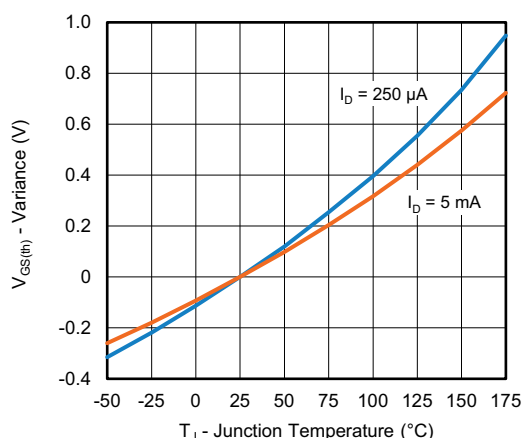

**Threshold Voltage**

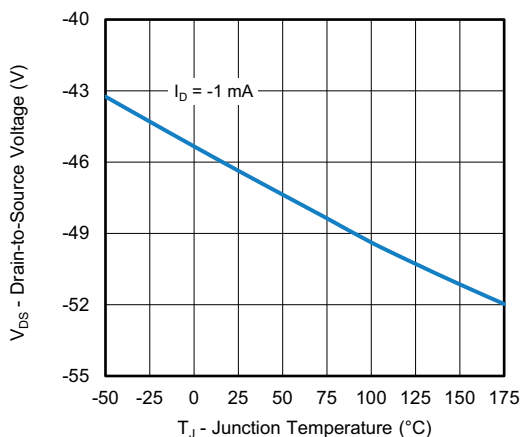

**Breakdown Voltage vs. Junction Temperature**

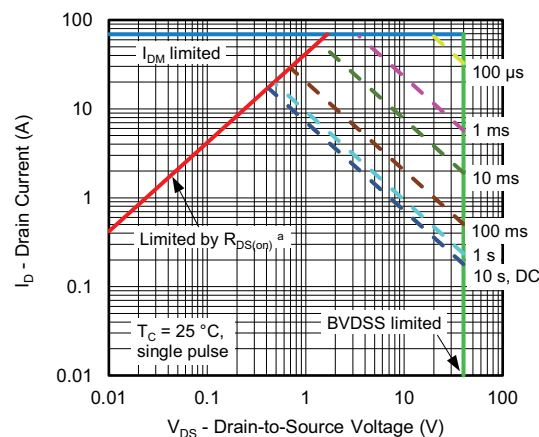


**Safe Operating Area**

**Note**


a.  $V_{GS} >$  minimum  $V_{GS}$  at which  $R_{DS(on)}$  is specified



**THERMAL RATINGS** ( $T_A = 25\text{ }^\circ\text{C}$ , unless otherwise noted)

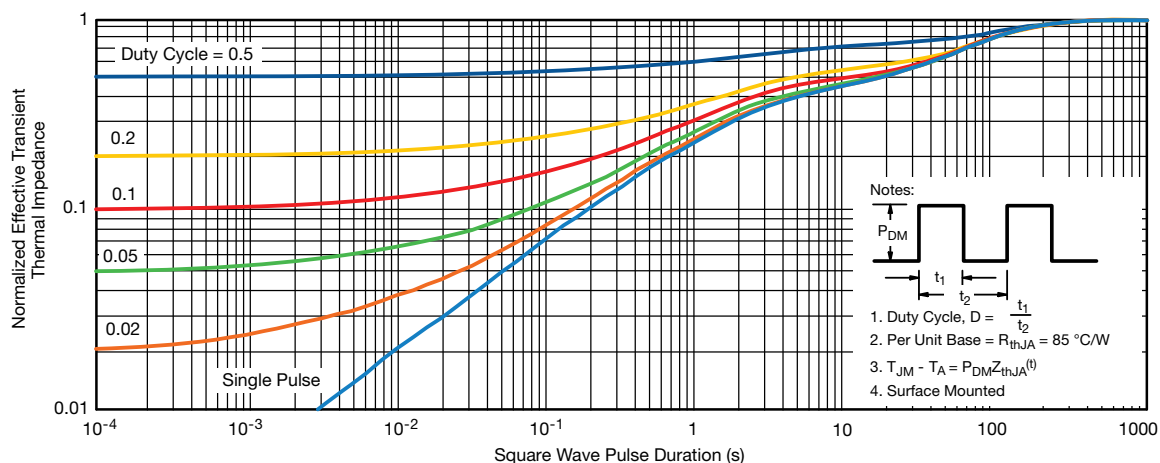

**Normalized Thermal Transient Impedance, Junction-to-Ambient**

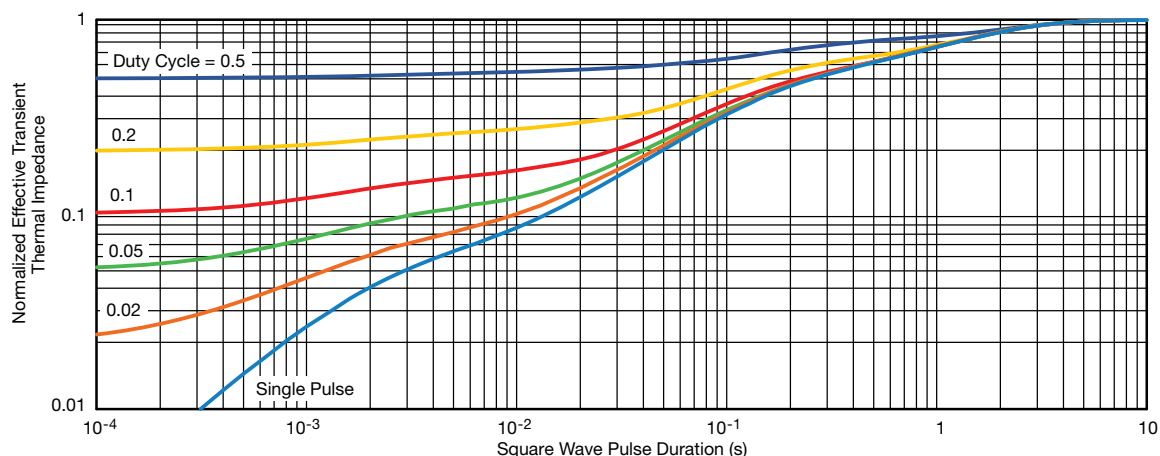

**Normalized Thermal Transient Impedance, Junction-to-Foot**

**Note**

- The characteristics shown in the two graphs
  - Normalized Transient Thermal Impedance Junction-to-Ambient ( $25\text{ }^\circ\text{C}$ )
  - Normalized Transient Thermal Impedance Junction-to-Foot ( $25\text{ }^\circ\text{C}$ )
- are given for general guidelines only to enable the user to get a “ball park” indication of part capabilities. The data are extracted from single pulse transient thermal impedance characteristics which are developed from empirical measurements. The latter is valid for the part mounted on printed circuit board - FR4, size 1" x 1" x 0.062", double sided with 2 oz. copper, 100 % on both sides. The part capabilities can widely vary depending on actual application parameters and operating conditions

Vishay Siliconix maintains worldwide manufacturing capability. Products may be manufactured at one of several qualified locations. Reliability data for Silicon Technology and Package Reliability represent a composite of all qualified locations. For related documents such as package / tape drawings, part marking, and reliability data, see [www.vishay.com/ppg?62016](http://www.vishay.com/ppg?62016).